


TIMING: S/NS
OPTIONAL KNOB TYPE
G 2-9
EG 2-6
VG 2-9

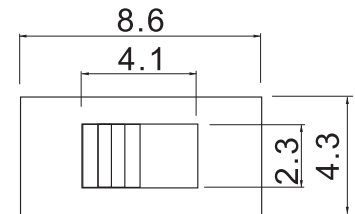

主要技术参数、性能
The Main Thchnology Performance

额定电流、电压 Rate voltage current	See detail spec
接触电阻 Contact resistance	50mΩ Max
绝缘电阻 insulated resistance	100mΩ Min
电寿命 Electrical Life	10,000 Cycles (Min)
使用温度 Service temperature	-25°C+ 80 °C
使用湿度 Ambient humidity used	≤85%RH
机械寿命 Mechanical Life	10,000 Cycles (Min)
耐焊温度 Withstand Soldering temperature	260°C ± 5°C 3S

E				
D				
C				
B				
A				
项目 ITEM	名称 DESCRIPTION	材质 MATERIAL	数量 QYT	表面处理/颜色 FINSH/COLOR

					第一视角 FIRST VIEW			名称/NAME: 拨动开关 TOGGLE SWITCH SERIES	
								型号/MODEL: SS-12D01(1P2T)	
标记 SING	处数 FREQUENCY	更改文件号 REVISION	签名 APPROVED	日期 DATE	比列 SCALE	一般公差 GENERAL TOLERANCE			
设计 DESIGN		Zhaoming			单位 UNIT	mm	0.5~2	±0.10	
审核 CHECKED		Zengyong			重量 WELGHT		2~5	±0.15	
批准 APPROVED		Fuyunfeng					5~10	±0.20	
							角度 ANGLE	±0.5°	

